


ROLL UP DOORS



Door curtains are manufactured of *galvanized steel* and are roll formed to a configuration that provides for *high wind strength* and *minimum flex*. All doors are prepainted with a high durability finish and come with a **40-Year Paint Warranty**. Doors are available in a variety of colors.

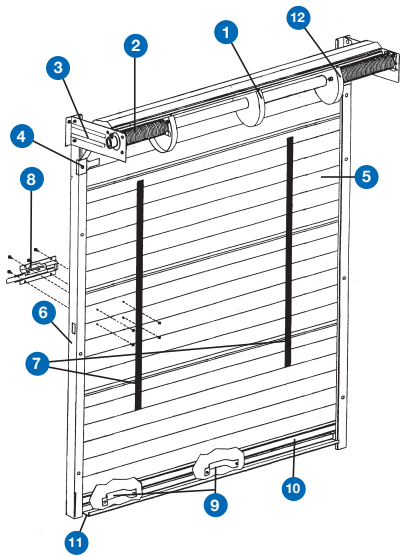

1. Axle Drums

Robotically welded to axle to ensure smooth operation. Exposed axle ends and springs are painted to protect against rustings.

2. Doors Springs

Springs are calibrated to operate with minimum adjustment.

3. Door Mounting Brackets

Made of 12 gauge galvanized coated steel and come standard with a tension adjuster that includes permanently lubricated radial bearings.

4. Door Stops

Made of 12 gauge galvanized steel to ensure a positive stop.

5. Door Curtain

Fabricated on automatic, state-of-the-art equipment to ensure curtain is square and securely crimped together.

6. Door Tracks

Heavy-duty 18 gauge galvanized steel.

7. Poly-felt Strips

100% polyester felt strips are applied to the backside of door curtains to protect the painted surface from damage and aid in a smooth operation.

8. Latch Assembly

Made of corrosive-resistant stainless steel that accommodates 2 shackled locks and will work industry alarm switches. Locks furnished by customer. Cylinder latches are optional.

9. Door Handles

Fabricated from 12 gauge galvanized steel. 1 handle provided on doors up to 6 ft. wide and 2 handles on doors over 6 ft. in width.


10. Door Bottom

Made of anodized aluminum for resistance to weather and corrosion. Reinforced by an acrylic-coated galvanized steel door stop channel.

11. Rubber Seal


Bulb-type seal retains its shape and sealing ability indefinitely down to -10 degrees fahrenheit.

12. Felt Material on Drums




Tension Adjuster

Standard equipment on all roll up doors, includes permanently lubricated radial bearings.




Curtain Panels

Hydraulically pressed together to form a crimped offset interlock that prevents panel separation during repeated use.




Door Stop Channel

Ensures a safe stop everytime, as it engages the head stop when door curtain is raised.



Polyethylene Edge Wear Guards


Locked to both track edges which ensure protection against door wear and misalignment.



Durable Springs with 10-Year Warranty




View of Installed Door Bracket




Poly-felt Strips for Sound Deadening & Paint Protection

door colors

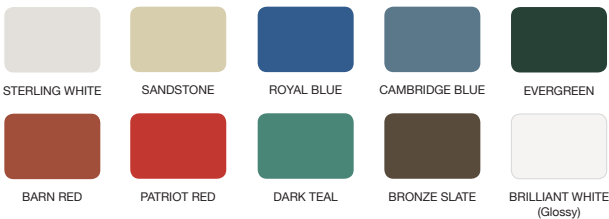

trim & panel colors

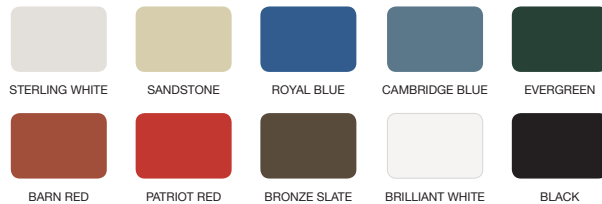

structural colors



Single Source Self Storage Specialists Since 1984

228 Commerce Blvd, Statesville, NC 28625 | 1-800-654-7813 | www.betcoinc.com

